

Packaging and Shipping

Product Number	Package Info
TTS22CS-03	Contents: Counter Stand Touchscreen Package Dimensions: 22" (56 cm) W x 10" (25 cm) H x 14" (36 cm) D Shipping: Package delivery service

Contents

Qty.	Description
1	22" Planar touchscreen
1	Spectrio media player (attached)
1	10' Extentsion Cord

Installation Requirements


Type	Description
Power	One (1) 100-240VAC 50 / 60Hz unswitched (always active) power outlet
Internet	Options: <ul style="list-style-type: none"> • Wired Ethernet (10/100/1000BASE-T) • 802.11 b/g/n wireless access point (VSN-provided) • 802.11 b/g/n wireless access point (customer-provided) <ul style="list-style-type: none"> • WPA2-PSK [AES] • WPA2-PSK [TKIP]
Tools	No Tools Required

Installation Guide


BEFORE INSTALLATION, CAREFULLY REMOVE CONTENTS FROM PACKAGING AND CONFIRM THAT ALL ITEMS ARE INCLUDED.

BEFORE INSTALLING THE COUNTER TOP TOUCHSCREEN, PLEASE ENSURE THAT A DEDICATED, UNSWITCHED POWER SOURCE HAS BEEN LOCATED TO POWER THE TOUCHSCREEN NEAR WHERE IT WILL BE INSTALLED.

1. Open the touchscreen shipping box and carefully take out the touchscreen.
2. Remove any shipping foam and bags covering the screen.
3. Place the screen upright and adjust the kickstand so the screen is at a comfortable viewing angle.
4. Plug in the power cord coming out of the base of the touchscreen. The device should power on automatically.
5. Follow the instructions displayed on the on-screen startup application to connect to the Internet, pair your device, and begin downloading your content.
6. If you've not yet configured your device, use your web browser to navigate to app.vs-networks.com, and sign into your Command account.
7. If you continue to have any problems, please contact Spectrio Customer Support.

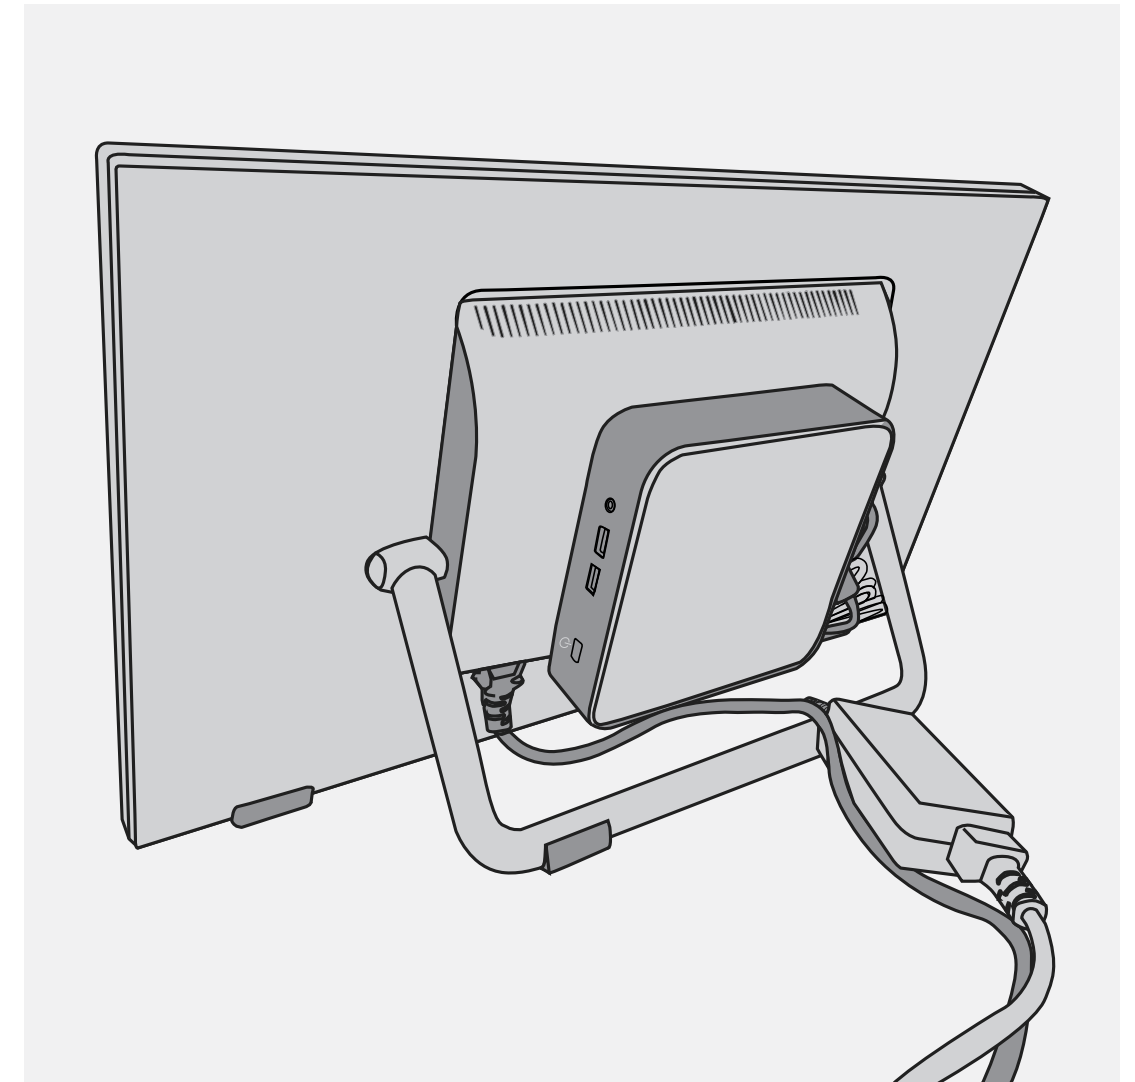


Safety Information



WARNING: Use of controls, adjustments, procedures, connections, or signal types other than those specified in your documentation may result in exposure to shock, electrical hazards, and/or mechanical hazards.

Spectrio products are not designed for use in hazardous environments. Place equipment on a hard, level surface.

- Do not stack the equipment, place in an enclosed space, or otherwise install where it is subject to heated air. The equipment should have at least 4 inches (10.2 cm) of clearance on all vented sides to permit the airflow required for proper ventilation. Restricting airflow can damage the equipment or cause overheating.



WARNING: Do not operate the equipment with any cover(s) removed (including covers, bezels, panel inserts, and so on).

- Do not use your equipment in a wet environment. Protect equipment from liquid intrusion.
- Do not use damaged equipment, including exposed, frayed, or damaged power cords.
- Do not push any objects into the air vents or openings of your equipment. Doing so can cause fire or electric shock by shorting out interior components.
- Do not attempt to service the equipment yourself.

Description

The TTS22CS is a counter top touchscreen media system that provides custom, interactive digital content with automatic software updates.

Features

Supported Content	Interactive custom catalog applications Dynamic/interactive HTML5 content
Display Features	22" (diagonal) high-definition 1920 x 1080 active-matrix TFT LCD panel (IPS) LED backlighting for low power consumption Multi-touch capable Internal 2W x 2 speakers
Additional Features	<ul style="list-style-type: none"> Cloud-hosted content management system Automatic software updates

Specifications

Dimensions	19.5" (49.5 cm) L x 11.5" (29.2 cm) H x 7" (18 cm) D
Weight	11 lb (5 kg)
Power Consumption	47W (Max) 37W (Nominal) 21W (Sleep)
AC Input	100-240VAC 50 / 60Hz
Operating Temperature	32°F - 104°F
Network Connectivity	<ul style="list-style-type: none"> 802.11 b/g/n WiFi <ul style="list-style-type: none"> WPA2-PSK [AES] WPA2-PSK [TKIP] Wired Ethernet (10/100/1000BASE-T)
Computer	<ul style="list-style-type: none"> 1.8 GHz Intel Celeron N3550 Processor 4GB DDR4 RAM, 64 GB SSD Intel HD graphics

Usage Guide


The Counter Top Touchscreen's content and system software are updated automatically, with no maintenance required by the user, provided the device has a constant connection to the Internet.

Web-Based Management Interface

The Counter Top Touchscreen is fully managed via a Web interface which can be accessed at app.vs-networks.com/. Using the Web interface, volume controls and hours of operation can be viewed and set. User accounts are provided by the Spectrio sales team. In some cases, you may need to use a single sign-on authentication service hosted by your employer, rather than a Spectrio-provided account.

Diagnostics Screen

Imagine the Tic-Tac-Toe number sequence on your screen (left picture below) and touch the screen (if you have a touchscreen setup) or use the USB mouse provided to you and click the number sequence 7002 to access the diagnostic screen (right picture below).

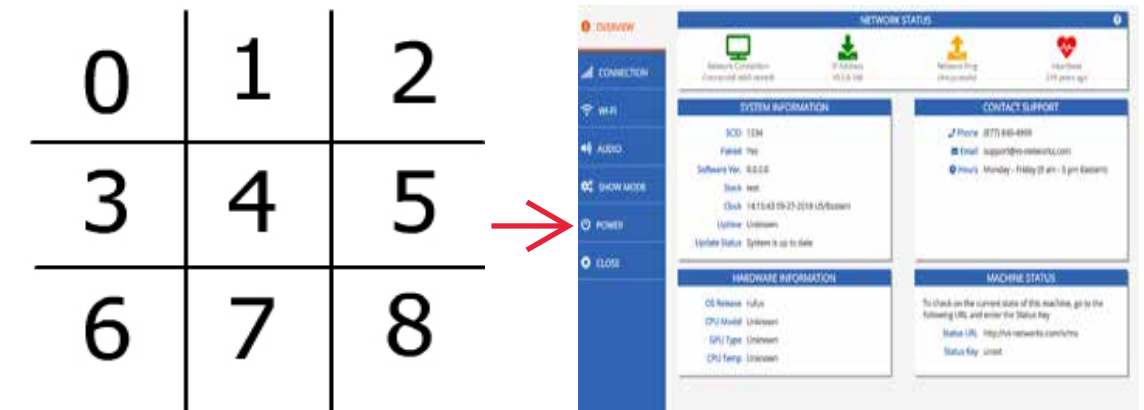

Restart and Shutdown

During maintenance and troubleshooting, it may be necessary to shutdown or restart the media player. To shutdown or restart the device select the desired action from the menu options at the top of the diagnostics screen. Enter 8-9-2 on the numeric keypad and select Submit.


Note: The passcode 8-9-2 is the default passcode for any action that must be unlocked on the diagnostic screen.

OSD (On Screen Display) and Power Lockout

The OSD and Power Locking feature have been enabled, pressing any of the Menu, Up, Down, Select Keys or Power switch will have no effect on the system.

Care and Maintenance

To maintain the appearance and operation of your Counter Top Touchscreen, periodic dusting and cleaning are highly recommended. To clean, use a dry microfiber cloth to remove any dust. If the screen has significant dirt and grime accumulation, distilled water may be used to slightly dampen a microfiber cloth (do not saturate). To prevent streaking, gently wipe the screen in straight lines until the surface is clean.



WARNING: Never use alcohol or strong solvents as these will damage the media player. Do not spray liquid directly on the media player as this may cause it to seep inside and cause permanent damage!